Product Information Sheet


HY6W 12V

GENERAL



HY6W 12V 6W BAZ9s	**Features** original equipment manufacturer quality, amber coating, lead free soldered bottom contact, hardglass, UV-cut
Ordering Number 38169	**Standard** ECE R37
Product Description halogen signalling lamp	**Typical Applications** indicator

TECHNICAL DETAILS

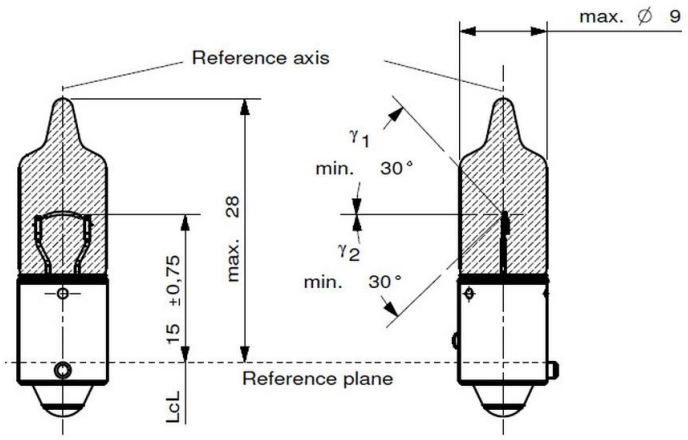

Geometry Light center length: 15mm ± 0,75mm Bulb diameter: max. 9mm	**Rated Voltage** ECE R37: 12V
	Rated Wattage max. 7,35W @13,5V
	Base BAZ9s
	Operating Conditions bottom contact temperature max. 200°C
	Luminous Flux 75 lm ± 17% @13,5V
	Lifetime B3: 400h @13,5V Tc: 800h @13,5V

DELIVERY DETAILS

Packaging Industrial Packaging: 1000pcs. (5×200) Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 4/12/2017 **replace for** 21.02.2013-V1-PN12/0235 **file** 38169 - HY6W 12V 6W BAZ9s.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com