
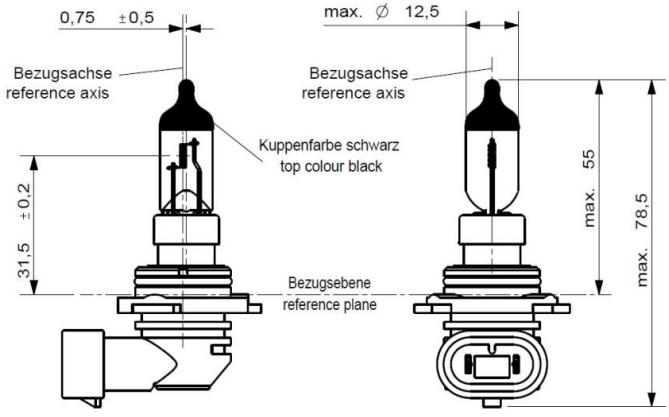


GENERAL

	Rally 12V 70W P22d	Features	black top color, hardglass
	Ordering Number 28026	Standard	not regulated
Product Description	halogen headlighting lamp	Typical Applications	low beam, fog light

TECHNICAL DETAILS

	Rated Voltage	12V
	Rated Wattage	70W @13,2V
Geometry	Base	P22d
Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm	Operating Conditions	burning position: horizontal, long electrode above filament
Lifetime	Luminous Flux	1650 lm ± 15% @13,2V
	Lifetime	B3: 80h @14,0V B50: 150h @14,0V Tc: 180h @14,0V

DELIVERY DETAILS

Packaging	Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only. Offroad only.
------------------	---	--

valid from 12/04/2017

replace for 20.02.2013-V1-PN12/0252

file 28026 - Rally 12V 70W P22d.100

Disclaimer:
Subject to change without notice. Errors and omission accepted.
Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com