
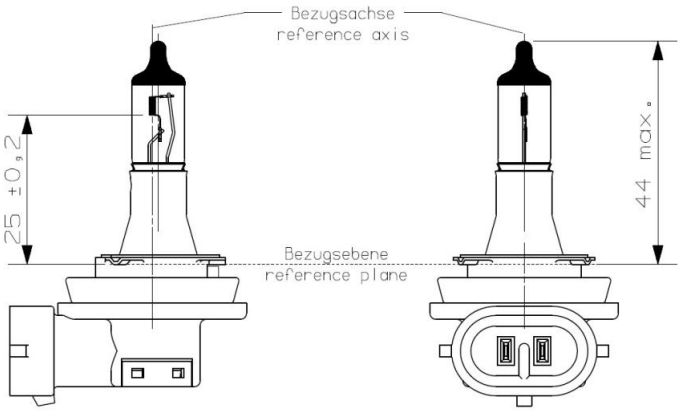


GENERAL

	H16 12V 19W PGJ19-3	Features	original equipment manufacturer quality, silver top color, hardglass, UV-cut
	Ordering Number 28071	Standard	ECE R37
Product Description	halogen headlighting lamp	Typical Applications	fog light, for adaptive frontlight system

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V
	Rated Wattage	max. 26W @13,2V
Geometry Light center length: 25mm ± 0,25mm Bulb diameter: max. 12,5mm	Base	PGJ19-3
	Operating Conditions	burning position: horizontal, long electrode above filament
Lifetime	Luminous Flux	500 +10%/-15% @13,2V
	Lifetime	B3: 1150h @13,2V Tc: 2000h @13,2V

DELIVERY DETAILS

Packaging	Industrial Packaging: 140pcs. (4×35) Commercial Box Packaging: 100pcs. (10×10×1)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 07.12.2017

replace for 12.04.2017

file 28071 - H16 12V 19W PGJ19-3.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.