


## Product Information Sheet HB4 +50 12V

GENERAL				
	HB4 +50 12V 51W P22d 9006 +50 12,8V 55W P22d +50 More Light	Features	original equipment manufacturer quality, high luminance, black top color, hardglass, UV-cut	
	Ordering Number 28086	Standard	ECE R37 DOT	
Product Description	halogen headlighting lamp	Typical Applications	low beam	

## **TECHNICAL DETAILS**

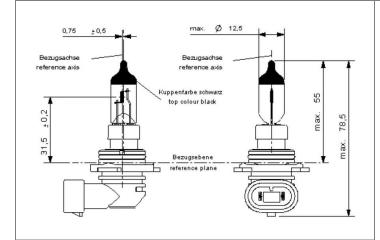

Geometry

Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm

Rated Voltage	ECE R37: 12V DOT: 12,8V	
Rated Wattage	max. 62W @13,2V max. 60W @12,8V	
Base	P22d	
Operating Conditions	burning position: horizontal, long electrode above filament	
Luminous Flux	1095 lm ± 15% @13,2V 1000 lm ± 15% @12,8V	
Lifetime	B3: 400h @14,0V B50: 890h @14,0V Tc: 980h @14,0V	

## **DELIVERY DETAILS**

Packaging

Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1) Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

 valid from
 12/04/2017
 replace for
 20.02.2013-V1-PN12/0252
 file
 28086 - HB4 +50 12V 51W P22d.100