
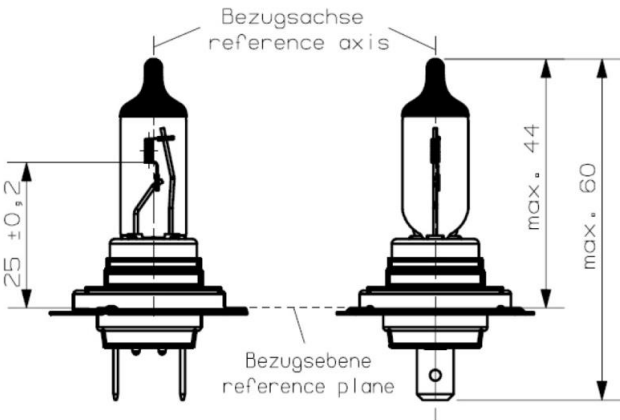


GENERAL			
	H7 +50 12V 55W PX26d +50 More Light	Features	original equipment manufacturer quality, high luminance, black top color, hardglass, UV-cut
	Ordering Number 28339	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 58W @13,2V	
Base	PX26d		
Operating Conditions	burning position: horizontal, long electrode above filament		
Luminous Flux	1500 lm ± 10% @13,2V		
Geometry	Light center length: 25mm ± 0,2mm Bulb diameter: max. 12,5mm	Lifetime	B3: 200h @13,2V Tc: 400h @13,2V

DELIVERY DETAILS	
Packaging	Industrial Packaging: 180pcs. (4×45) Commercial Box Packaging: 100pcs. (10×10×1)
Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	

valid from 12/04/2017

replace for 19.02.2013-V1-PN12/0240

file 28339 - H7 +50 12V 55W PX26d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com