
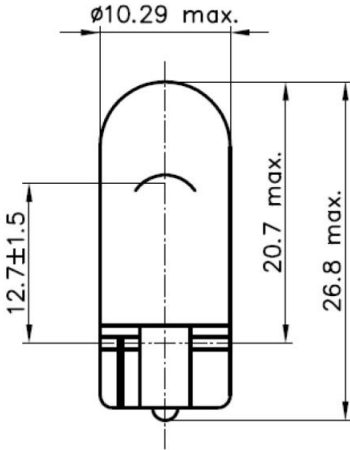


GENERAL

	WY5W 12V 5W W2,1x9,5d	Features	amber coating, softglass
	Ordering Number 37169	Standard	ECE R37
Product Description	Incandescent signalling lamp	Typical Applications	indicator

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V
	Rated Wattage	max. 5,5W @13,5V
Geometry Light center length: 12,7mm ± 1,5mm Bulb diameter: max. 10,29mm	Base	W2,1x9,5d
	Operating Conditions	burning position: horizontal
	Luminous Flux	30 lm ± 20% @13,5V
Lifetime	B3: 450h @13,5V Tc: 1000h @13,5V	

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 12/04/2017

replace for 23.07.2015-V1-PN14/0499

file 37169 - WY5W 12V 5W W2,1x9,5d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.