
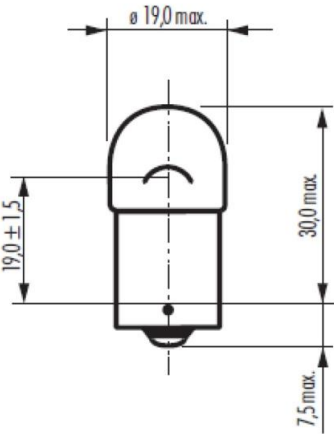


GENERAL			
	<b>R5W</b> <b>12V 5W BA15s</b>	<b>Features</b>	softglass
	<b>Ordering Number</b> 37171	<b>Standard</b>	ECE R37
<b>Product Description</b>	Incandescent signalling lamp	<b>Typical Applications</b>	rear light, parking light

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 12V	
	<b>Rated Wattage</b>	max. 5,5W @13,5V	
<b>Geometry</b> Light center length: 19mm ± 1,5mm Bulb diameter: max. 19mm	<b>Base</b>	BA15s	
	<b>Operating Conditions</b>	burning position: horizontal	
	<b>Luminous Flux</b>	50 lm ± 20% @13,5V	
<b>Lifetime</b>	B3: 150h @13,5V Tc: 400h @13,5V		

DELIVERY DETAILS		
<b>Packaging</b>	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 13/08/2018

replace for 12/04/2017

file 37171 - R5W 12V 5W BA15s.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.