
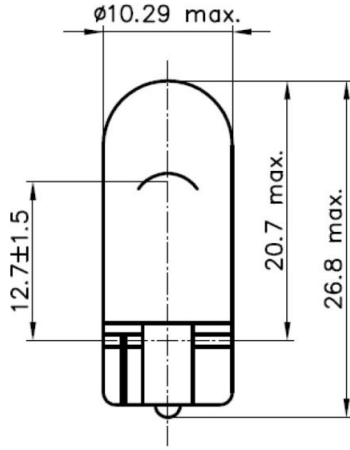


GENERAL

	W5W 12V 5W W2,1x9,5d	Features	softglass
	Ordering Number 37177	Standard	ECE R37
Product Description	Incandescent signalling and interior lamp	Typical Applications	indicator, parking light, interior light

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V
	Rated Wattage	max. 5,5W @13,5V
Geometry Light center length: 12,7mm ± 1,5mm Bulb diameter: max. 10,29mm	Base	W2,1x9,5d
	Operating Conditions	burning position: horizontal
Lifetime B3: 600h @13,5V Tc: 1000h @13,5V	Luminous Flux	50 lm ± 20% @13,5V

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 12/04/2017

replace for 23.07.2015-V2-PN14/0499

file 37177 - W5W 12V 5W W2,1x9,5d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.