
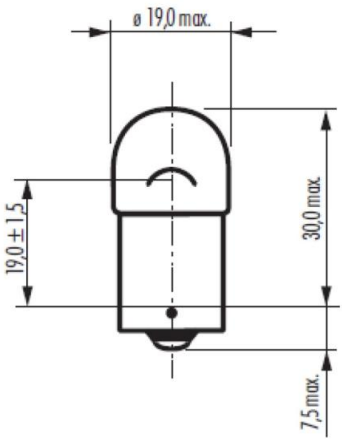


GENERAL

	R5W 24V 5W BA15s	Features	softglass
	Ordering Number 37181	Standard	ECE R37
Product Description	Incandescent signalling lamp with single coil	Typical Applications	rear light, parking light

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 24V
	Rated Wattage	max. 7,7W @28V
Geometry Light center length: 19mm ± 1,5mm Bulb diameter: max. 19mm	Base	BA15s
	Operating Conditions	burning position: horizontal
	Luminous Flux	50 lm ± 20% @28V
	Lifetime	B3: 100h @28V Tc: 250h @28V

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 13/08/2018

replace for 24/10/2017

file 37181 - R5W 24V 5W BA15s.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com