
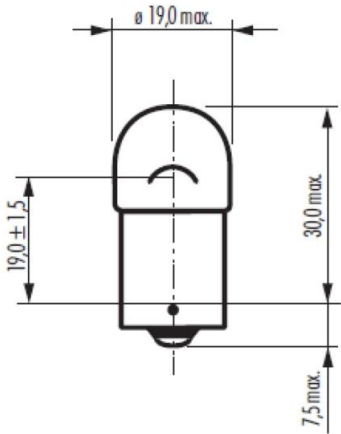


| GENERAL | | | |
|---|---------------------------------|-----------------------------|-----------------------------|
|  | R10W 12V 10W BA15d | Features | softglass |
| | Ordering Number 37312 | Standard | ECE R37 |
| Product Description | Incandescent signalling lamp | Typical Applications | rear light, reversing light |

| TECHNICAL DETAILS | | | |
|--|-----------------------------|---------------------------------------|--|
|  | Rated Voltage | ECE R37: 12V | |
| | Rated Wattage | max. 11W @ 13,5V | |
| Geometry Light center length: 19mm ± 1,5mm Bulb diameter: max. 19mm | Base | BA15d | |
| | Operating Conditions | burning position: horizontal | |
| | Luminous Flux | 125 lm ± 20% @ 13,5V | |
| | Lifetime | B3: 500h @ 13,5V Tc: 1000h @ 13,5V | |

| DELIVERY DETAILS | | |
|------------------|--|---|
| Packaging | Commercial Box Packaging: 200pcs. (20×10) | Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only. |

valid from 24/10/2017

replace for 12/04/2017

file 37312 - R10W 12V 10W BA15d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.