
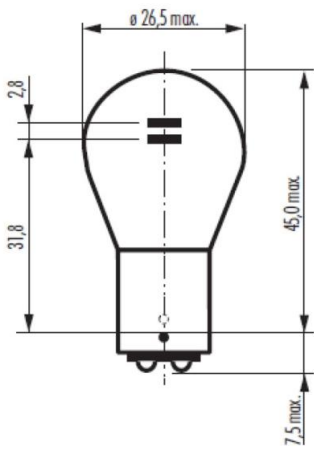


GENERAL			
	<b>P21/5W</b> 12V 21W/5W BAY15d	<b>Features</b>	softglass
	<b>Ordering Number</b> 37916	<b>Standard</b>	ECE R37
<b>Product Description</b>	Incandescent signalling lamp	<b>Typical Applications</b>	combined indicator and rear light, combined stop and rear light

TECHNICAL DETAILS			
	<b>Rated Voltage</b>	ECE R37: 12V	
	<b>Rated Wattage</b>	max. 26,5W/6,6W @13,5V	
<b>Geometry</b> Light center length: 31,8mm Bulb diameter: max. 26,5mm	<b>Base</b>	BAY15d	
	<b>Operating Conditions</b>	burning position: horizontal	
	<b>Luminous Flux</b>	440 lm ± 15% / 35 lm ±20% @13,5V	
	<b>Lifetime</b>	B3: 250/1000h @13,5V Tc: 480/2000h @13,5V	

DELIVERY DETAILS		
<b>Packaging</b>	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

valid from 14.08.2017

replace for 14.08.2015-V3-PN14/0499

file 37916 - P21/5W 12V 21W/5W BAY15d.100

**Disclaimer:**  
 Subject to change without notice. Errors and omission accepted.  
 Always make sure to use the most recent release.