
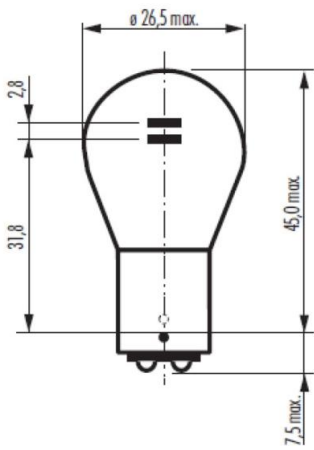


GENERAL

	Stop P25 12V 21/5W BA15d	Features	softglass
	Ordering Number 37918	Standard	not regulated
Product Description	Incandescent signalling lamp	Typical Applications	stop light

TECHNICAL DETAILS

	Rated Voltage	12V	
	Rated Wattage	21W/5W @13,5V	
Base	BA15d		
Operating Conditions	burning position: horizontal		
Luminous Flux	440 lm ±15% / 35 lm ± 20% @13,5V		
Geometry	Light center length: 31,8mm Bulb diameter: max. 26,5mm	Lifetime	B3: 60/600h @13,5V Tc: 160/1600h @13,5V

DELIVERY DETAILS

Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	--	---

valid from 28/05/2018

replace for 15.05.2018

file 37918 - Stop P25 12V 21/5W BA15d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.