
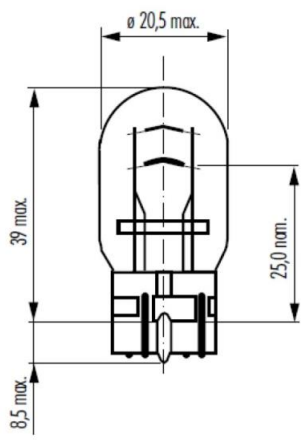


GENERAL			
	W21/5W 12V 21W/5W W3x16q	Features	softglass
	Ordering Number 37919	Standard	ECE R37
Product Description	Incandescent signalling lamp	Typical Applications	combined indicator and rear light, combined stop and rear light

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 26,5W/6,6W @13,5V	
Geometry Light center length: 25mm Bulb diameter: max. 20,5mm	Base	W3x16q	
	Operating Conditions	burning position: horizontal	
	Luminous Flux	440 lm ± 15% / 35 lm ± 20% @13,5V	
	Lifetime	B50: 375/750h @14,0V Tc: 500/1000h @14,0V	

DELIVERY DETAILS		
Packaging	Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.