
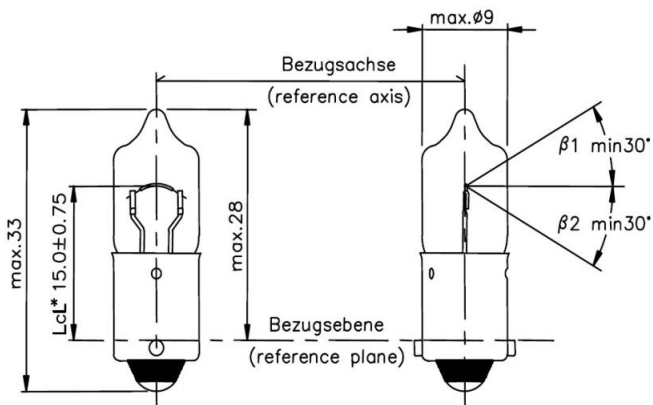


GENERAL			
	H6W LLT 12V 6W BAX9s Long Lifetime	Features	original equipment manufacturer quality, lead free soldered bottom contact, hardglass, UV-cut
	Ordering Number 38162	Standard	ECE R37
Product Description	halogen signalling lamp	Typical Applications	indicator, parking light

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 7,35W @13,5V	
Base	BAX9s		
Operating Conditions	bottom contact temperature max. 200°C		
Luminous Flux	125 lm ± 12% @13,5V		
Geometry	Light center length: 15mm ± 0,75mm Bulb diameter: max. 9mm	Lifetime	B3: 750h @13,5V Tc: 1500h @13,5V

DELIVERY DETAILS			
Packaging	Industrial Packaging: 1000pcs. (5×200) Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	