
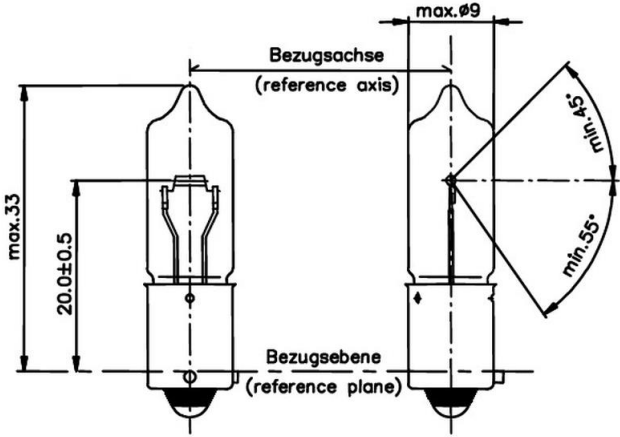


GENERAL

	H21W 12V 21W BAY9s	Features	original equipment manufacturer quality, lead free soldered bottom contact, hardglass, UV-cut
	Ordering Number 38191	Standard	ECE R37
Product Description	halogen signalling lamp	Typical Applications	indicator, rear fog light, reversing light

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 26,25W @13,5V	
Base	BAY9s		
Operating Conditions	bottom contact temperature max. 200°C		
Luminous Flux	600 lm ± 12% @13,5V		
Geometry	Light center length: 20mm ± 0,5mm Bulb diameter: max. 9mm	Lifetime	B3: 250h @13,5V Tc: 500h @13,5V

DELIVERY DETAILS

Packaging	Industrial Packaging: 1000pcs. (5×200) Commercial Box Packaging: 200pcs. (20×10)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	-------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------

valid from 12/04/2017

replace for 21.02.2013-V1-PN12/0250

file 38191 - H21W 12V 21W BAY9s.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.