
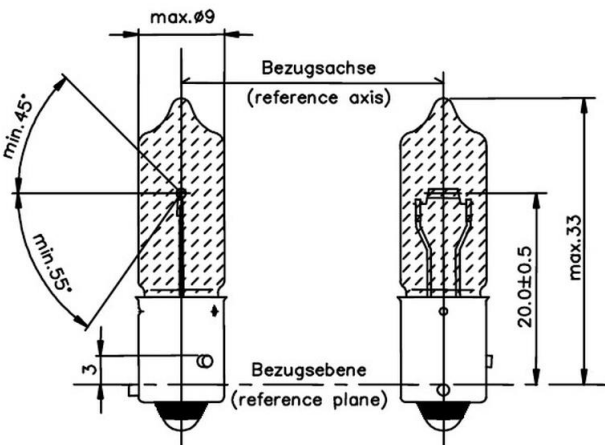


GENERAL			
	HY21W LLT 12V 21W BAW9s Long Lifetime	Features	original equipment manufacturer quality, amber coating, lead free soldered bottom contact, hardglass, UV-cut
	Ordering Number 38195	Standard	ECE R37
Product Description	halogen signalling lamp	Typical Applications	indicator

TECHNICAL DETAILS			
	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 26,25W @13,5V	
Base	BAW9s		
Operating Conditions	bottom contact temperature max. 200°C		
Luminous Flux	300 lm ± 17% @13,5V		
Geometry	Light center length: 20mm ± 0,5mm Bulb diameter: max. 9mm	Lifetime	B3: 500h @13,5V Tc: 1000h @13,5V

DELIVERY DETAILS	
Packaging	Industrial Packaging: 1000pcs. (5×200) Commercial Box Packaging: 200pcs. (20×10)
Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.	