
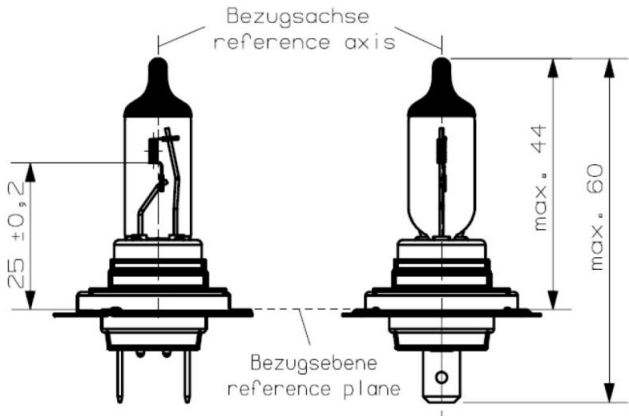


GENERAL

	H7 LLT+ 12V 55W PX26d Long Lifetime Plus	Features	original equipment manufacturer quality, black top color, hardglass, UV-cut
	Ordering Number 27329	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, high beam, fog light

TECHNICAL DETAILS

	Rated Voltage	ECE R37: 12V	
	Rated Wattage	max. 58W @13,2V	
Base	PX26d		
Operating Conditions	burning position: horizontal, long electrode above filament		
Luminous Flux	1500 lm ± 10% @13,2V		
Geometry	Light center length: 25mm ± 0,2mm Bulb diameter: max. 12,5mm	Lifetime	B3: 700h @13,2V Tc: 1200h @13,2V

DELIVERY DETAILS

Packaging	Industrial Packaging: 180pcs. (4x45)	Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.
------------------	---	---

valid from 14.08.2017

replace for 06.02.2015-V1-PN15/0066

file 27329 - H7 LLT+ 12V 55W PX26d.100

Disclaimer:
 Subject to change without notice. Errors and omission accepted.
 Always make sure to use the most recent release.

vosla GmbH Plauen Germany
www.vosla.com