


Product Information Sheet HB4 BLUE 12V

GENERAL			
	HB4 BLUE 12V 51W P22d 9006 BLUE 12,8V 55W P22d Blue Version	Features	original equipment manufacturer quality, bright white light, blue top color, blue coating, color temperature up to 4000K, hardglass, UV-cut
	Ordering Number 28613	Standard	ECE R37 DOT
Product Description	halogen headlighting lamp	Typical Applications	low beam, fog light

TECHNICAL DETAILS

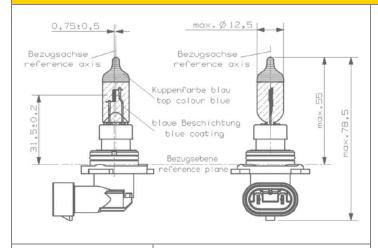

Geometry

Light center length: 31,5mm ± 0,2mm Bulb diameter: max. 12,5mm

Rated Voltage	ECE R37: 12V DOT: 12,8V	
Rated Wattage	max. 62W @13,2V max. 60W @12,8V	
Base	P22d	
Operating Conditions	burning position: horizontal, long electrode above filament	
Luminous Flux	1095 lm ± 15% @13,2V 1000 lm ± 15% @12,8V	
Lifetime	B3: 150h @14,0V B50: 350h @14,0V Tc: 360h @14,0V	

DELIVERY DETAILS

Packaging

Industrial Packaging: 200pcs. (5×40) Commercial Box Packaging: 100pcs. (10×10×1) Handle with care. Please store up and install the lamps free of mechanical damage, heat and moisture. For use in closed luminaires only.

 valid from
 12/04/2017
 replace for
 26.01.2015-V3-PN15/0043
 file
 28613 - HB4 BLUE 12V 51W P22d.100